


BOOT - UNI - INSULATED - SPIGOT OPPOSITE OPEN END

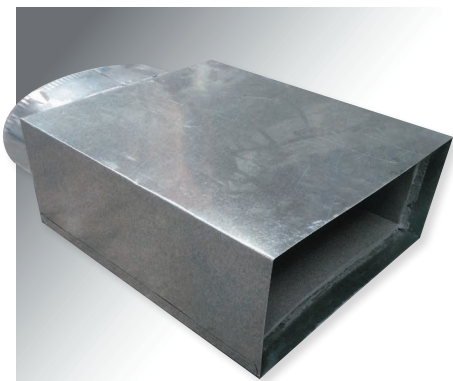

Features

- Spigot is placed at the top entry.
- Generally used in side-blow applications where it may be necessary to achieve maximum throw across the conditioned space.

Uni Boot - Insulated - Spigot Opposite Open End

Item #	Sizes Available/Dimensions			
	Size (L x W x H)		Spigot Size	
	mm	inch	mm	inch
442306	300 x 100 x 400	12" x 4" x 16"	Ø 150	Ø 6"
442307	300 x 100 x 400	12" x 4" x 16"	Ø 200	Ø 8"
442308	300 x 100 x 400	12" x 4" x 16"	Ø 250	Ø 10"
442309	350 x 150 x 400	14" x 6" x 16"	Ø 200	Ø 8"
443899	350 x 150 x 400	14" x 6" x 16"	Ø 250	Ø 10"
442311	350 x 150 x 400	14" x 6" x 16"	Ø 300	Ø 12"

All sales are made on the basis of the 'Polyaire Terms and Conditions of Trade' ©2016 Polyaire™ Pty Ltd. The manufacturer reserves the right to alter product specifications without notice. E. & O.E. Conditions Apply.